

MONTAGEANLEITUNG

AKKU-RASENMÄHER



DE

GB

NL

FR

ES

PT

IT

SI

HR

RS

PL

CZ

SK

HU

DK

SE

NO

FI

EE

LT

LV

RO

BG

RU

UA


GR

MK




TR




4211 Li P

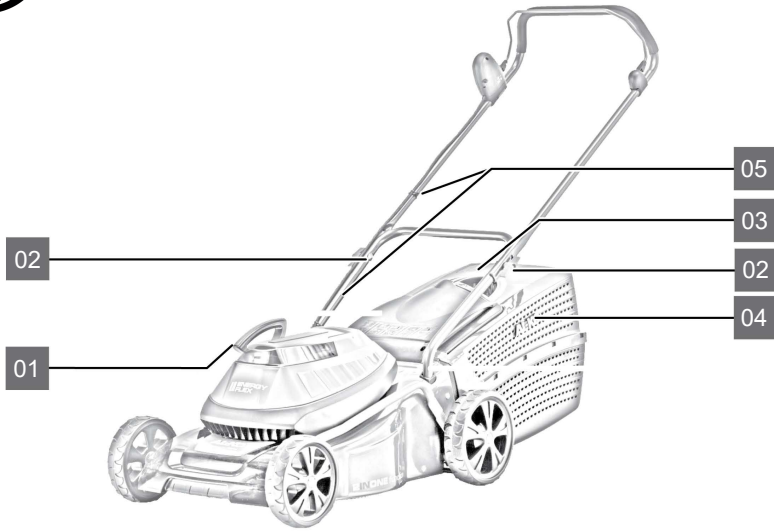


01



02a

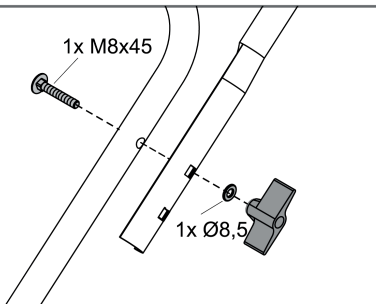


02b

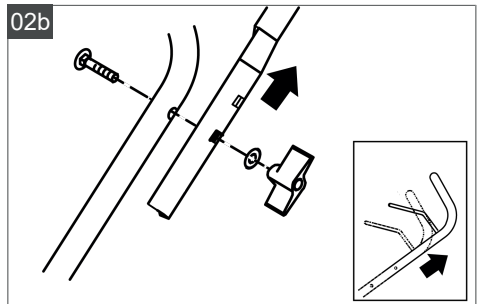





03

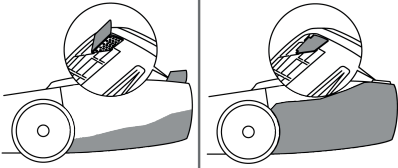


04a

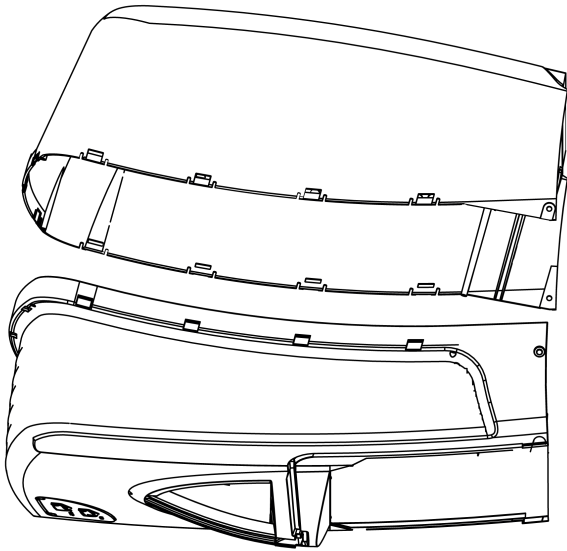


04b

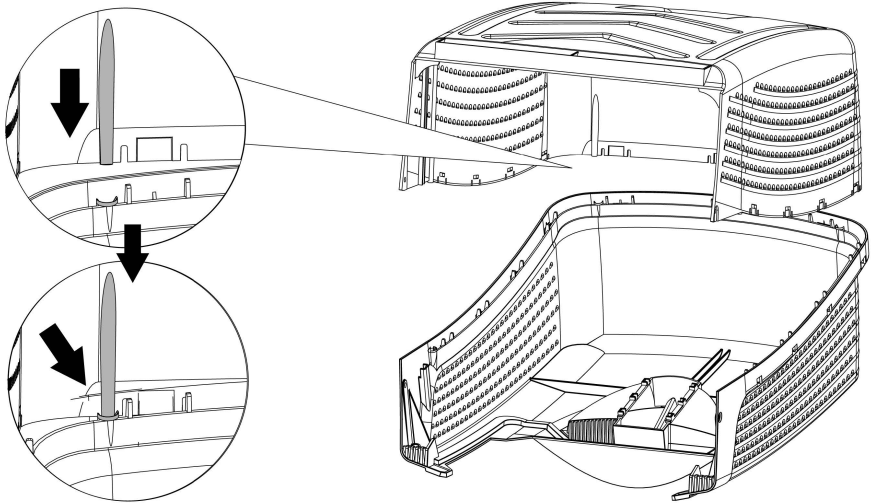


04c




04d




04e

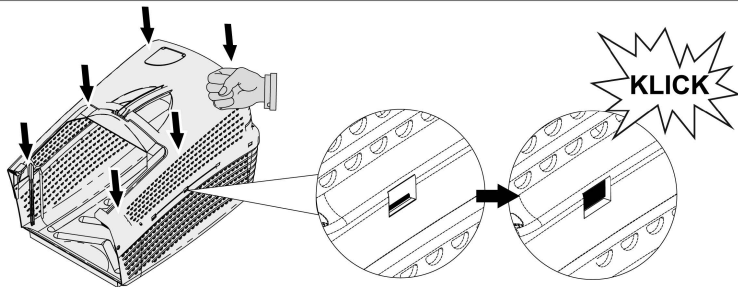


04f

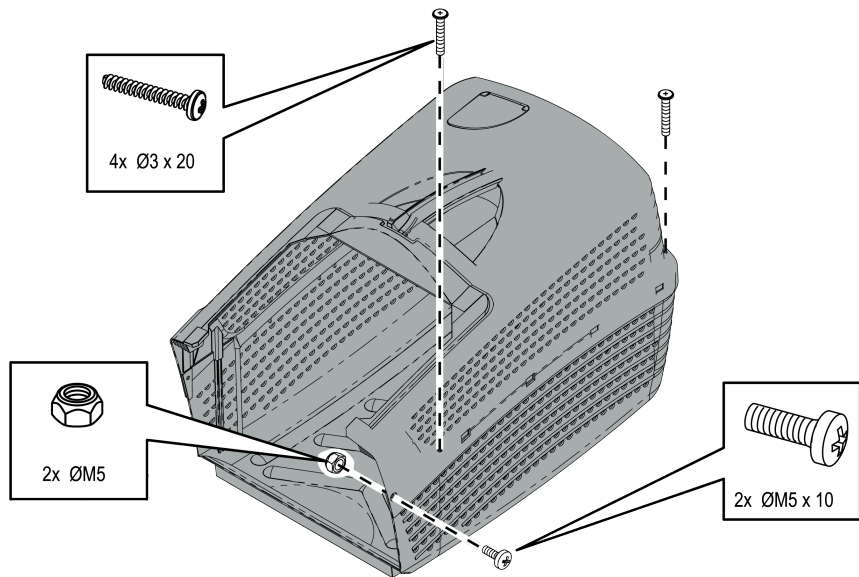


04g




04h

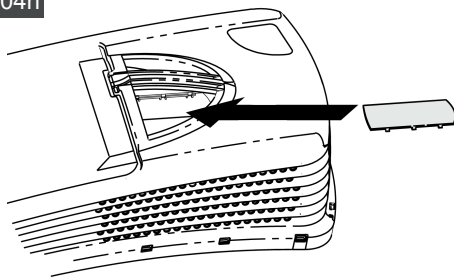

04i

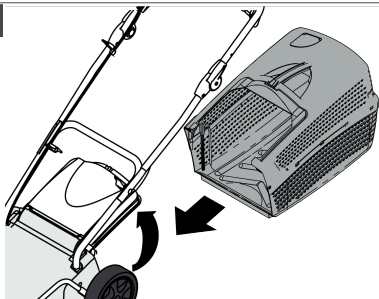


05








4611 Li SP

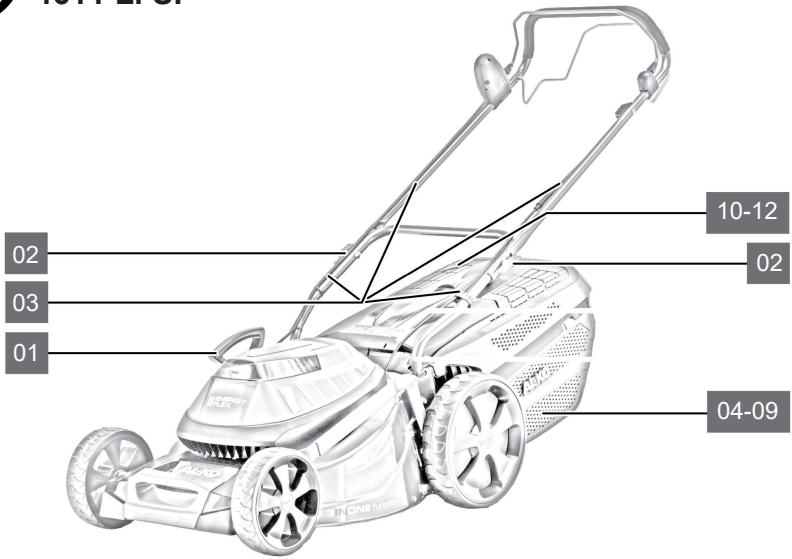


01









02a

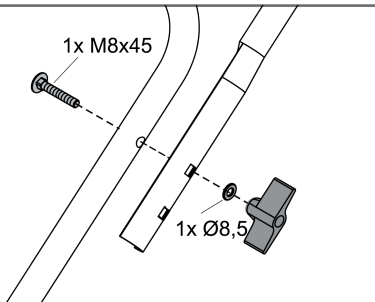


02b

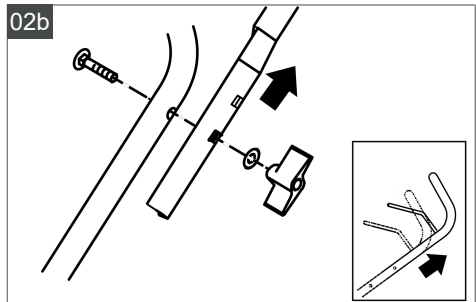


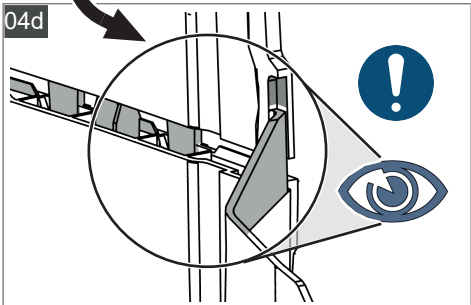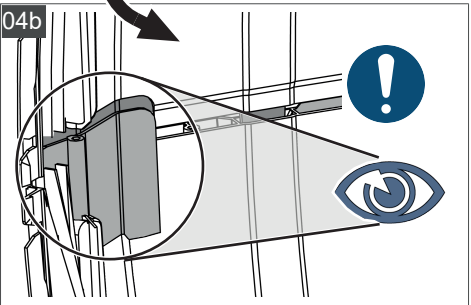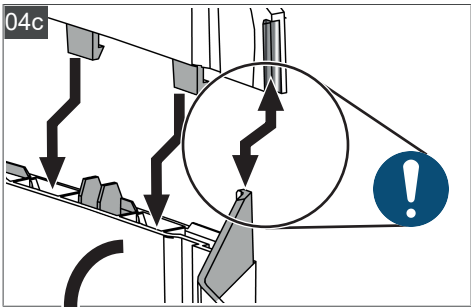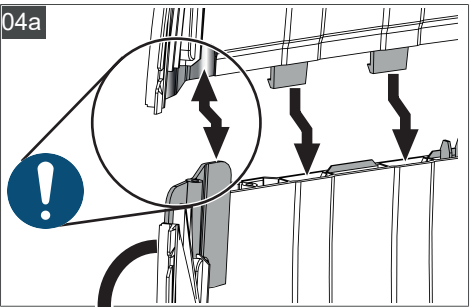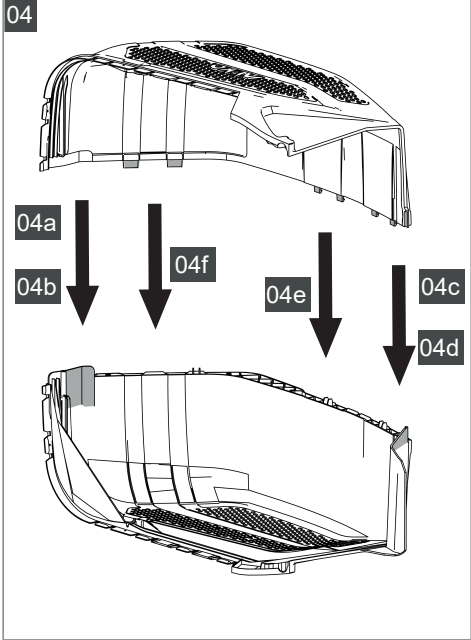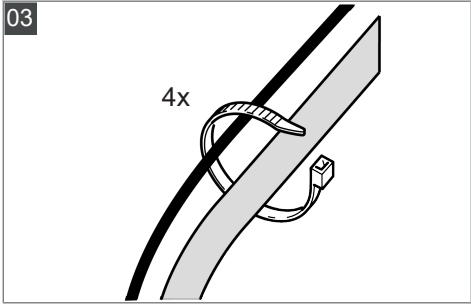


04e

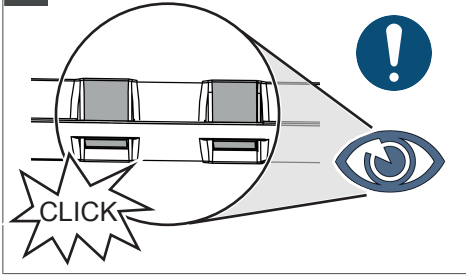


04f

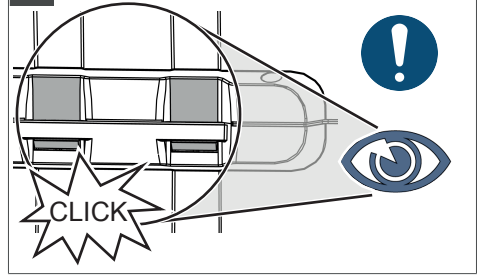


05

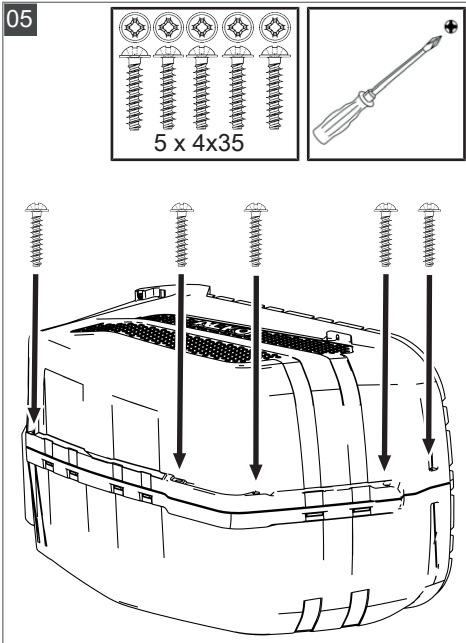


06

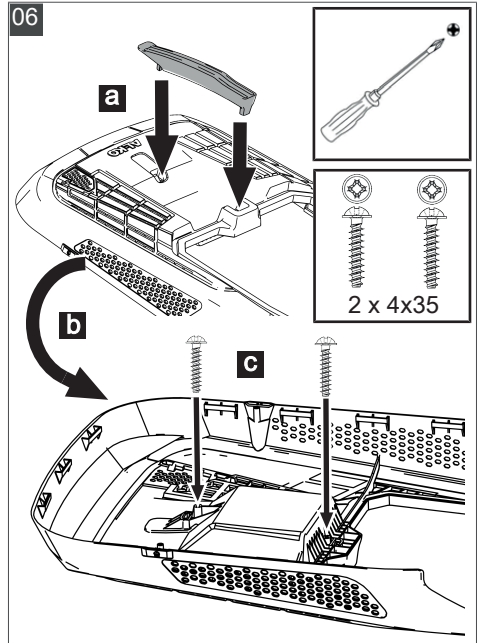


07

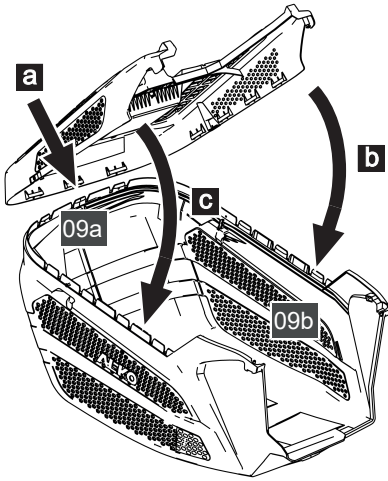



07a

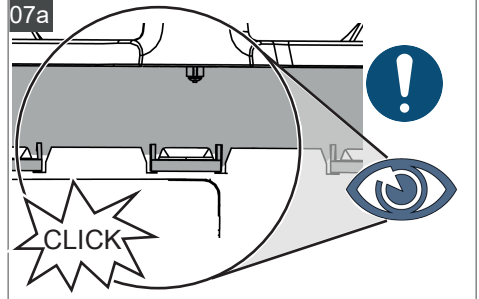


07b

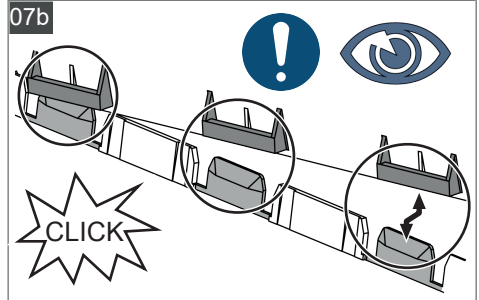


08

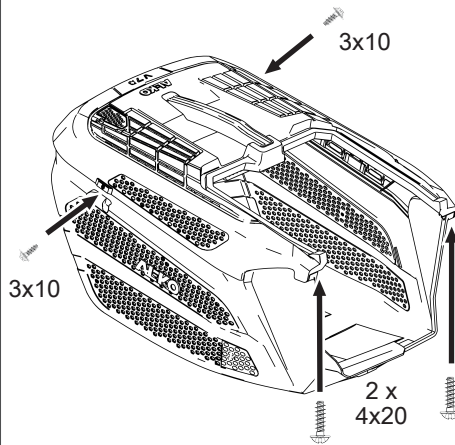


09

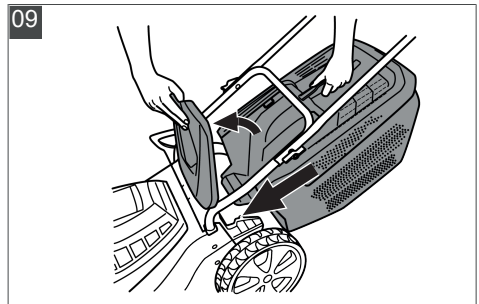


10

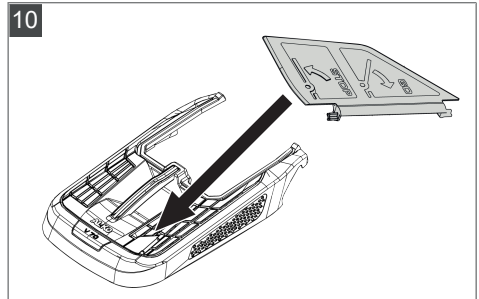

11

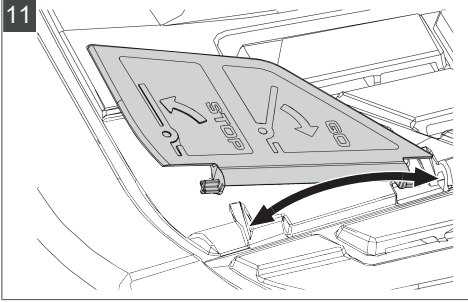



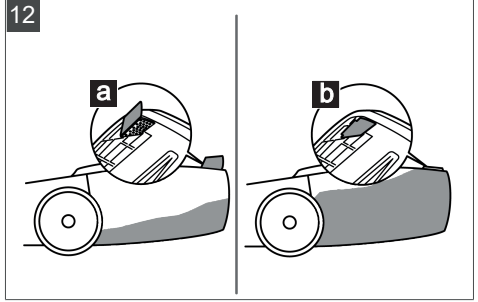










12





	4211 Li P Art.-Nr. 127624 	4611 Li SP Art.-Nr. 127625
	42 cm	46 cm
	2,5 cm – 7,5 cm	3 cm – 8 cm
	LpA = 79,9 dB(A)	LpA = 80 dB(A)
	LwA = 91,4 dB(A)	LwA = 90,4 dB(A)
	$a_{hv} < 2,5 \text{ m/s}^2$ [K = 1,5 m/s ²]	
	23,7 kg	31,2 kg
	65 l	70 l
	IPX1	
	-	X
	max. 3200 min ⁻¹	max. 2900 min ⁻¹



 B200 Li (B05-3650G) Art.-Nr. 113524	
	36 V (40 V max.)
	5 Ah
	180 Wh
	+5 °C – +40 °C
	0 °C – +25 °C
  C130 Li (C05-4230) Art.-Nr. 113281	
	100 V – 240 V AC 50/60 Hz; 140 W
	42 V
	3 A
	1,5 h (4 Ah) 2,0 h (5 Ah)
	+5 °C – +40 °C